



REV. A	REVISION RECORD	DESIGN	DATE
	First Issue	罗垂战	2021.07.01
	包胶改成带上铁框结构	罗垂战	2022.02.23



### 正视图

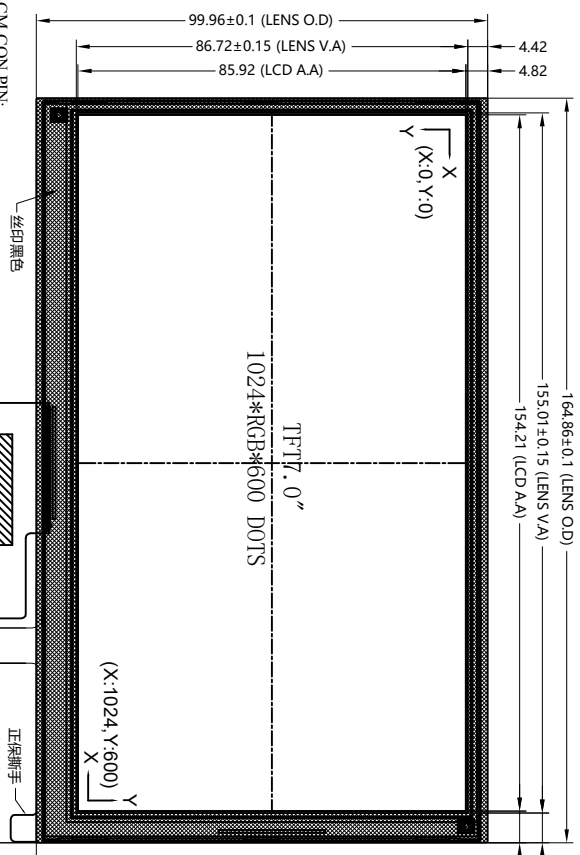

### 侧视图

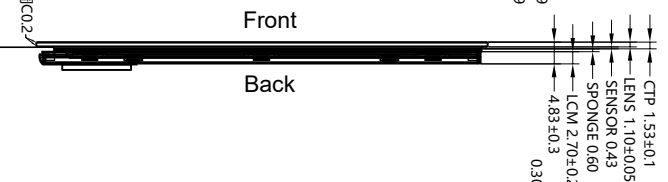

### 背视图

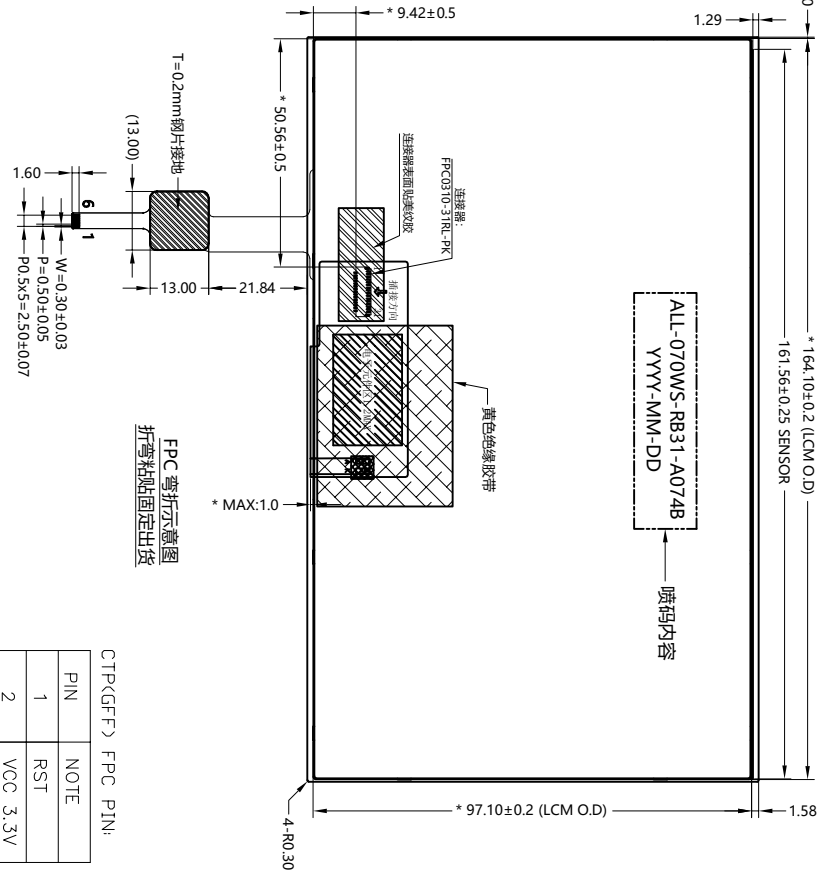

CTP(GFF) FPC PIN:

PIN	NOTE
1	RST
2	VCC 3.3V
3	GND
4	INT
5	SDA 3.3V
6	SCL 3.3V

LCM CON PIN:

PIN SYMBOL	LCM CON PIN:
1	LED+
2	LED+
3	LED+
4	NC
5	LED-
6	LED-
7	LED-
8	LED-
9	GND
10	GND
11	MIP1 2P
12	MIP1 2N
13	GND
14	MIP1 1P
15	MIP1 1N
16	GND
17	MIP1 CLKP
18	MIP1 CLKN
19	GND
20	MIP1 0P
21	MIP1 0N
22	GND
23	MIP1 3P
24	MIP1 3P
25	GND
26	VDDI0
27	RESSET
28	GND
29	VDDI0
30	VDD
31	VDD

- LCM NOTES:
1. Display Type: 7.0" 1024\*600 WSVGA IPS TFT
  2. Viewing Direction: ALL
  3. Driver IC: EK99007/AD3(Source) & EK73217BCGA(Gate)
  4. Operating Temp.: -10°C TO 50°C
  5. Storage Temp.: -20°C TO 60°C
  6. BL Type: 21 Chip-WHITE LEDs, If=140mA, Vf=9.6V(TYP); LCM+CTP Luminance: 290cd/m<sup>2</sup> MIN, 330cd/m<sup>2</sup> TYP; White Chromaticity: X=0.29±0.04, Y=0.31±0.04;
  7. With "\*" is the focus of inspection dimension
  8. Dimensions with mark "(") are reference
  9. RoHS must be Compliant

- CTP NOTES:
1. 结构类型: G+F+F
  2. 盖板材质: 旭硝子
  3. IC型号: GT911
  4. 分辨率: 1024\*600, 触摸原点: 左上角
  5. VDD: 3.3V, IIC通信电压: 3.3V
  6. 表面硬度: ≥6H, 透光率: ≥85%
  7. Operating Temp.: -20°C TO 60°C; Storage Temp.: -30°C TO 70°C;
  8. Unspecified Tolerance: ±0.2mm;
  9. With "\*" is the focus of inspection dimension
  10. Dimensions with mark "(") are reference
  11. RoHS must be Compliant

CUSTOMER APPROVE



深圳市优奕视界有限公司  
SHENZHEN VIEWO TECHNOLOGY CO., LTD

MODULE NO.	ALL-UE070WS-RB31-A074B	DRAWN	罗垂战
TITLE	LCM-CTP	CHECKED	肖喜亮
SCALE	1:1	APPROVE	钟泽林
	第三视角		
		PAGE:	1/1